



Short Specification:

LouversLED brings you the LRR4 and LRR6 LED Recessed Retrofits. They're the perfect additions to various indoor lighting applications. Their low operating temperatures can yield up to 90% in energy savings over traditional lighting products. Our fixtures have been designed with longer life-time and reliability in mind. For more information on these LED's, please contact your LouversLED sales representative today.



LRR4



LRR6

MODEL	DESCRIPTION	WATTS	LUMENS	VOLTS
LRR4	4" LED Recessed Retrofit	9	684	120/277V
LRR6	6" LED Recessed Retrofit	15	1,200	120/277V



Application:


- Conference Rooms
- Offices
- Retail

Features:


- cULus listed
- RoHS compliant
- Energy Star rated
- Instant on light
- Mercury free
- Made of aluminum alloy
- 2,700K to 6,000K color temperatures
- CRI: >80
- IP20
- Operating temp: -20°C to +40°C
- Dimmable (Multi-volt models not dimmable)
- 35,000 hour life rating
- 3 year limited warranty

Dimensions:

LRR4

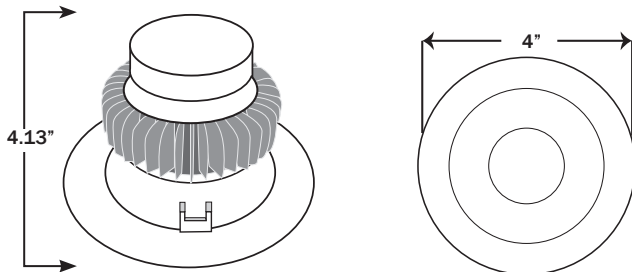

LRR6

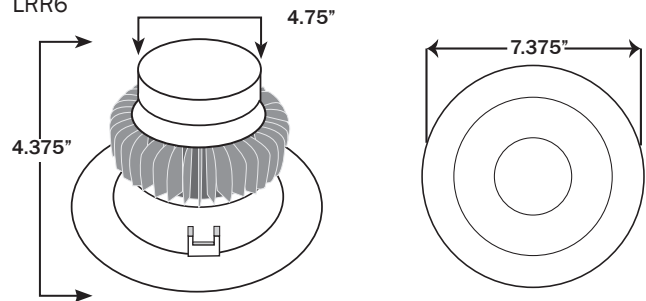

LRR 4 & 6

LED Recessed Downlight Retrofit

Ordering Information:

PRODUCT	COLOR TEMP	LENS TYPE	VOLTAGE	DIMMING
LRR4-9	27K - 2,700 K	FR - Frosted	120V	Yes
LRR6-15	3K - 3,000 K 4K - 4,000 K 45K - 4,500 K 55K - 5,500 K 6K - 6,000 K		MV - 110/277V *	

Indicates most widely used fixture

Sample Part Number: LRR4-9-27K-FR-120V

*MV models not available in dimming.

Please note all varieties are not stock items. 4" MV model is special order. Consult factory for details.