



Short Specification:

LouversLED's Venus LED Panel Lights are LED retrofit replacement alternatives for fluorescent fixtures. The Venus LED is available in three different sizes to fit your lighting needs. Its advanced lighting distribution and attractive appearance deliver unprecedented energy savings of up to 70%. This high-efficacy light delivers long life and excellent color ensuring a superior lighting installation. For more information, contact your LouversLED sales representative today.



MODEL	LENGTH	WATTS	LUMENS	DIMMABLE
LI-ZY-P1-40W XNZ 3000K	1' X 4'	40	4,724.2	0 - 10V
LI-ZY-P1-40W XDZ 4000K	1' X 4'	40	5,035	0 - 10V
LI-ZY-P1-40W XDZ 5000K	1' X 4'	40	5,098	0 - 10V
LI-ZY-P4-30W-CNS 3500K ADVANCED	2' X 2'	30	3,884.5	0 - 10V
LI-ZY-P4-30W-CDS 4000K ADVANCED	2' X 2'	30	3,900	0 - 10V
LI-ZY-P4-30W-CDS 5000K ADVANCED	2' X 2'	30	3,900	0 - 10V
LI-ZY-P4-40W-CNS 3500K ADVANCED	2' X 2'	40	4,810	0 - 10V
LI-ZY-P4-40W-CDS 4000K ADVANCED	2' X 2'	40	5,000	0 - 10V
LI-ZY-P4-40W-CDS 5000K ADVANCED	2' X 2'	40	5,000	0 - 10V
LI-ZY-P7-40W XNZ (3500K)	2' X 4'	40	5,040.3	0 - 10V
LI-ZY-P7-40W XNZ (4000K)	2' X 4'	40	5,240	0 - 10V
LI-ZY-P7-40W XNZ (5000K)	2' X 4'	40	5,225	0 - 10V
LI-ZY-P7-50W-CDS 3500K ADVANCED	2' X 4'	50	6,004.2	0 - 10V
LI-ZY-P7-50W-CDS 4000K ADVANCED	2' X 4'	50	6,250	0 - 10V
LI-ZY-P7-50W-CDS 5000K ADVANCED	2' X 4'	50	6,250	0 - 10V



Applications:

- Airports
- Commercial Use
- Conference/Meeting Rooms
- Factories
- Hospitals
- Hotels
- Industrial Lighting
- Offices
- Residential Buildings
- Schools/Colleges/Universities

Features:

- cULus listed
- CE certified
- Aluminum body and housing
- Emits soft and wide light
- Ultra slim design
- Instant on light
- Advanced driver
- 120/277V
- 4,000K or 5,000K color temperature
- Operating temp: -20°C to +50°C
- 50,000 hour life rating
- 5 year limited warranty

Certification Data:

UL Standard: UL1598, UL8750 and CSA C22.2 No.250-0.08 Luminaires




VENUS

LED Panel Lights

Dimensions:

2x2

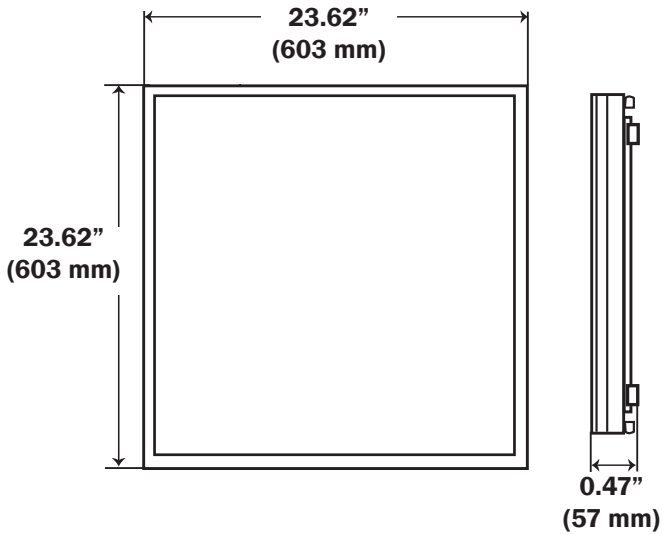

2x4

