




Application:

1. Turn off power and remove door frame and diffuser.
2. Remove existing lamps, lamp holder, socket brackets, ballast cover and electronic ballasts.
3. Secure LED strips with self-tapping screws.
4. Place the LED driver in the location where the electronic ballast was and secure with self-tapping screws.
5. Wire LED strips and driver according to the wiring diagram (see below).
6. Connect input wires with the driver with wire connections.
7. Place the original ballast cover back.
8. Install lens and frame.

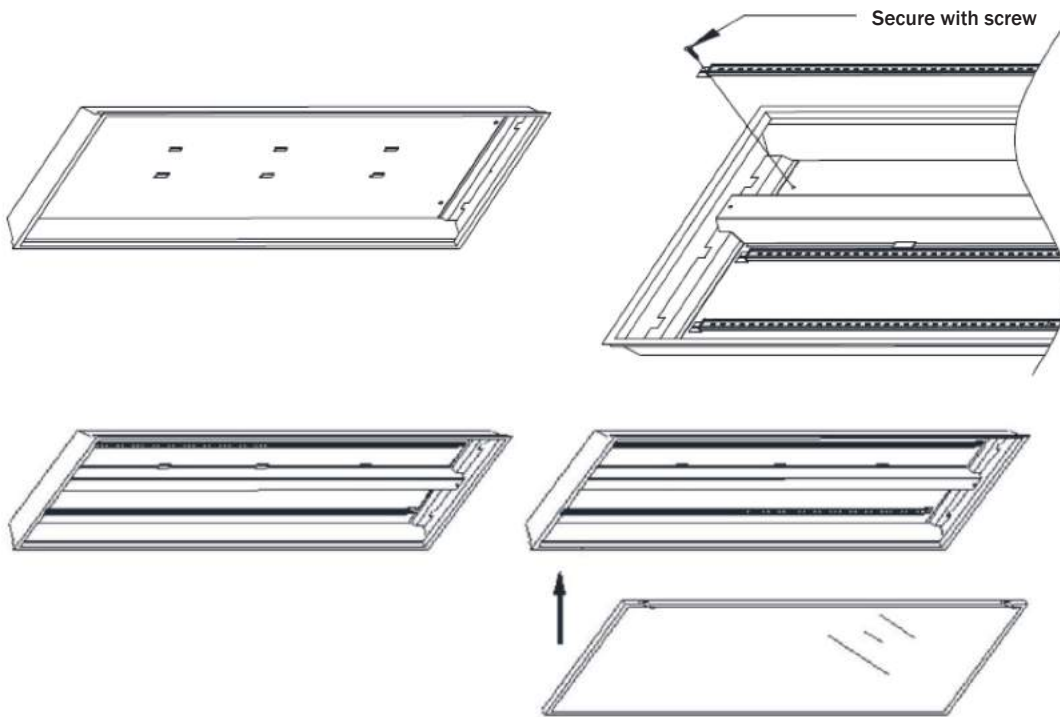

Wiring Diagram

