



### Short Specification:

The Para Image™ Series is a full line of high quality louvers that creates an ambiance which is pleasant, productive and efficient. Non-parabolic aluminum louvers eliminate glare and brightness, are economical and versatile, and very easy to clean and maintain. The Para Image™ Aluminum 3 has an open grid non-flammable design, allowing use in air ventilation applications and for concealing fire sprinkler systems (be sure to check with prevailing fire codes). Aluminum eggcrate is produced from a high quality aluminum material that is available in a broad range of colors and finishes.

### Application:

The aluminum eggcrate louver is approved by UL for use under sprinkler systems and can be used in lighting fixture or luminous ceiling applications and is very commonly used in elevators.

### Features:

Louvers International Aluminum Eggcrate is available in nominal 2' x 4' and 30" x 60". Our fabrication division can customize to almost any size. Call for details.

### Ordering Information:

Four empty rectangular boxes for ordering information.




Product Series	Cell Size	Size*	Color
LIPA3 - Aluminum Eggcrate	50 = 1/2" x 1/2" x 1/2" 75** = 3/4" x 3/4" x 3/4" 100 = 1" x 1" x 1" 200** = 2" x 2" x 2"	24 = 24 3/4" x 47 3/4" 36 = 29 3/4" x 59 3/4"	W - White Enamel B - Black Enamel MF - Mill Finish A** - Anodized
	**Special order, please call for more details.	* Call for custom sizes	**Special order, please call for more details.

Indicates most widely used fixture

Sample Part Number: LIPA3-50-24-W

### Care & Handling:

Great care should be exercised when handling louvers, avoiding contact with oily and/or foreign substances, Always handle louver panels with clean white gloves - NEVER USE BARE HANDS. Always install these louvers after the space has been completed and is ready for occupancy - never during construction.

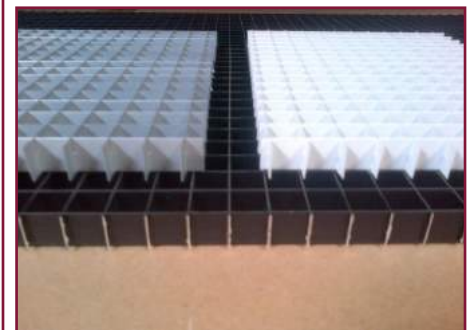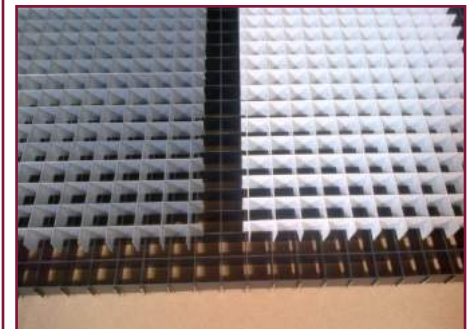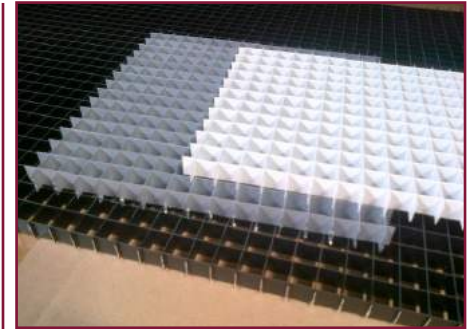

**Technical Data**

V.C.P: 99%  
Shielding Angle: 45°

