

Short Specification:



Made in U.S.A.

How say can you see the Anthem LED Highbay? This made in the USA luminaire will give you a firm handshake while kicking the competition squarely in the seat of their pants. The Anthem has what you need to complete lighting jobs in the most energy efficient, cost effective way possible. All the while, employing hard-working Americans. This bad boy is listed in the DLC PREMIUM category because it mimics the work ethics of the AMERICAN workforce. Hard-working lighting from and for the land of the free and the home of the brave.



MODEL	DESCRIPTION	WATTS (Actual)	LUMENS (With Lens)	LUMENS (Without Lens)
AHM-70	Anthem 70W LED Low Bay	70 (70.1)	8,529	8,950
AHM-96	Anthem 96W LED High Bay	96 (96.6)	12,000	12,588
AHM-150	Anthem 150W LED High Bay	150 (150.6)	18,903	19,829
AHM-195	Anthem 195W LED High Bay	195 (193.2)	24,000	25,176
AHM-250	Anthem 250W LED High Bay	250 (248.2)	30,816	32,326

* Information based on results for models tested with diffused lens at 4,000K CCT; ALL MODELS ARE 120/277V



Application:

- Airplane Hangars
- Auditoriums
- Convention Centers
- Factories
- Gymnasiums
- Ice Arenas
- Indoor Lighting
- Industrial Spaces
- Large Retail Stores
- Malls
- Storage Areas
- Warehouses

Features:


- DLC listed
- UL listed
- RoHS compliant
- Compact design
- Extremely efficient (Approx. 130 lm/w)
- Light-weight and easy to hang
- 4,000K and 5,000K color temperatures
- CRI: +80
- Operating temp: -20° C to +40° C
- 0 to 10V dimming
- L70 at 100,000 hours
- 5 year limited warranty



Made in the U.S.A.




Dimensions:

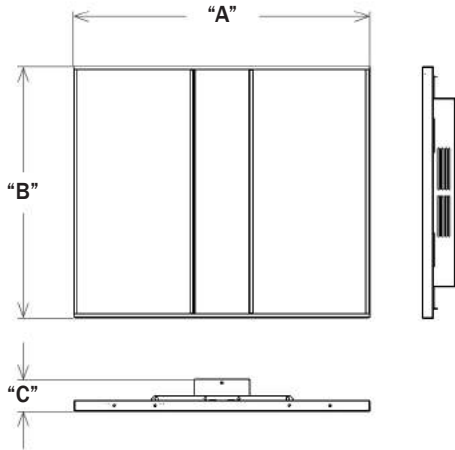

MODEL	"A" WIDTH	"B" LENGTH	"C" DEPTH
AHM-70	14 IN.	18.6 IN.	2.4 IN.
AHM-96	14 IN.	20.5 IN.	2.4 IN.
AHM-150	22 IN.	18.5 IN.	2.4 IN.
AHM-195	22 IN.	20.5 IN.	2.4 IN.
AHM-250	30 IN.	18.6 IN.	2.4 IN.

Dimensions:

AHM-150-4K

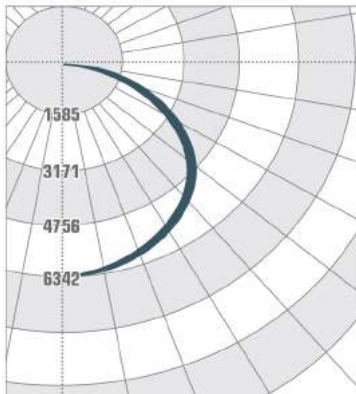


0-180	1.32
90-270	1.32
Diagonal	1.36

INTENSITY SUMMARY

ZONE	LUMENS	% FIXT
0-20	1910.05	10.6
0-30	5042.11	27.9
0-40	8004.52	44.3
0-60	14567.22	80.6
0-80	17658.69	97.7
0-90	18069.75	99.9
10-90	17581.27	97.2
20-40	6094.47	33.7
20-50	9120.63	50.4
40-70	852.53	47.1
60-80	3091.47	17.1
70-80	1130.64	6.3
80-90	411.06	2.3
90-110	9.1	0.1
90-120	9.1	0.1
90-130	9.1	0.1
90-150	9.1	0.1
90-180	9.1	0.1
110-180	0	0
0-180	18078.86	100

Mounting Options:

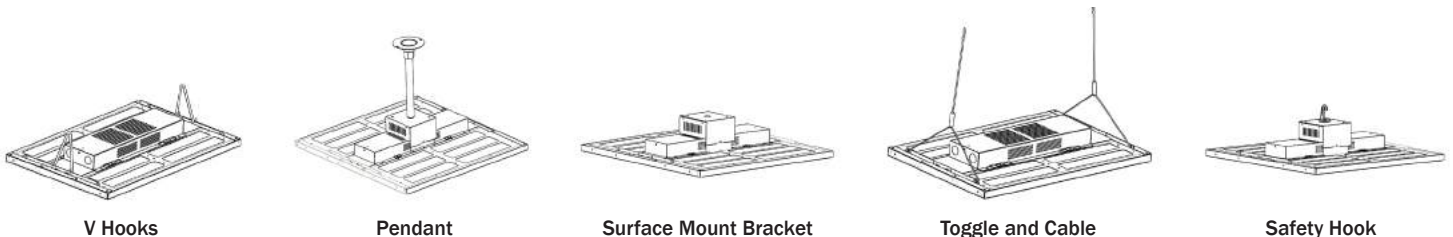

Ordering Information:

--	--	--	--	--	--	--	--

PRODUCT SERIES Watts (Lumens)	CCT	VOLTAGE	LENS TYPE	DIMMING	MOUNT	CORD & PLUG	OPTIONS
AHM 70 – 70.1W (8,529 Lm)	4K - 4,000K	U - 120/277V	D - Diffused	D - (0 to 10V)	N - None	N - None	N - None
AHM 96 – 96.6W (12,588 Lm)	5K - 5,000K	H - 347/480V	N - None		B - Surace	15B	SE
AHM 150 – 150.6W (19,829 Lm)					Mount Bracket	15W	SED1
AHM 195 – 193.2W (25,176 Lm)					H - Safety Hook	65B	
AHM 250 – 248.2W (32,326 Lm)					P - Pendant*	65W	
					T - Toggle & Cable	1L5B	
					V - V Hooks	1L5W	
						1L6B	
						1L6W	
						1L7B	
						1L7W	
						1SB	
						1SW	
						6FW	
						6L5B	
						6L5W	
						6L6B	
						6L6W	
						6L7B	
						6L7W	
						6SB	
						6SW	

 Indicates stock options

* 3/4" threaded hub is standard. Louvers Intl does not provide pendant.

Sample Part Number: AHM150-5K-U-D-D-T-N-N

Cord & Plug Descriptions:

- 15B – 10' Black 5-15 Straight Blade Plug
- 15W – 10' White 5-15 Straight Blade Plug
- 65B – 6' Black 5-15 Straight Blade Plug
- 65W – 6' White 5-15 Straight Blade Plug
- 1L5B – 10' L5-15 Black 120V Twist Lock
- 1L5W – 10' L5-15 White 120V Twist Lock
- 1L6B – 10' L6-15 Black 250V Twist Lock
- 1L6W – 10' L6-15 White 250V Twist Lock
- 1L7B – 10' L7-15 Black 277V Twist Lock
- 1L7W – 10' L7-15 White 277V Twist Lock
- 1SB – 10' Standard Black 120/277V (No Plug)
- 1SW – 10' Standard White 120/277V (No Plug)
- 6FW – 6' Flexible Whip
- 6L5B – 6' L5-15 Black 120V Twist Lock
- 6L5W – 6' L5-15 White 120V Twist Lock
- 6L6B – 6' L6-15 Black 250V Twist Lock
- 6L6W – 6' L6-15 White 250V Twist Lock
- 6L7B – 6' L7-15 Black 277V Twist Lock
- 6L7W – 6' L7-15 White 277V Twist Lock
- 6SB – 6' Standard Black 120/277V (No Plug)
- 6SW – 6' Standard White 120/277V (No Plug)

Options Descriptions:

- SE – Occupancy Only
- SED1 – Bi-Level; Daylight Harvesting and Occupancy