




**Short Specification:**

Louvers International's Strip Reflector Kits are used to convert 4' and 8' T12 and older T8 lamp fixtures resulting in substantial energy savings, improved lighting and excellent return on investments. These kits, in conjunction with several ballast and lamp configurations, can easily produce ideal IES recommended light levels with minimized energy consumption. Our kits will continue to provide consistent fixture performance and repeat annual energy savings for many years to come. Add the flexibility of our bracketing system and the Strip Reflector Kit will allow for proper fit in almost any application.

**Features:**

- Proudly designed, made and manufactured in the U.S.A.
- Utility rebate-friendly throughout the U.S.A.
- Reflectors meet UL classified ballast cover requirements
- Flexibility for tandem wiring applications
- Locking lamp holder notches
- 1, 2 or 3 lamp options available
- Aluminum components generate a rust-free approach to less maintenance and lasting appeal

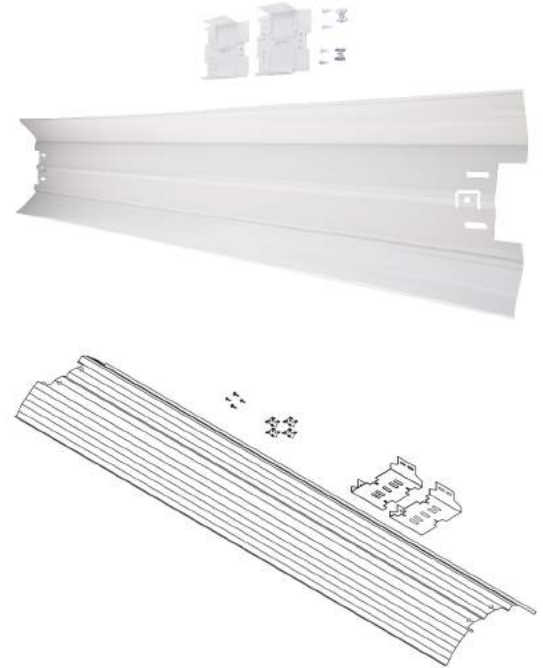


**Ordering Chart:**

| SERIES                                    | SIZE                                  | BRACKET COLOR  | FINISH                 | LAMP HOLDERS       |
|---|---------------------------------------|--|------------------------|--------------------|
| <b>SRK</b> – Strip Reflector Retrofit Kit | 4 = 4' Section<br>8 = (2) 4' Sections | U - Universal Cover (5.25")<br>N - Narrow Cover (4.3") | S - Miro4<br>W - White | T5 = T5<br>T8 = T8 |

**Quick, Safe and Labor Efficient**

- Streamlined packaging for easy job site management
- Snap-in lamp holders won't fall out during overhead installation
- With one third the weight of steel, aluminum components permit reduced shipping cost and simpler installation.

**Data and Dimensions for SRK Universal**

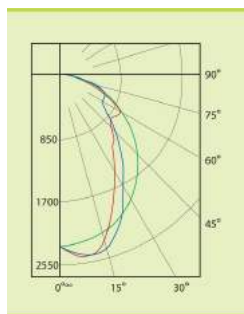

0°  
45°  
90°  
**Candala Plot  
2 Lamp T8**

**Zonal Lumen Summary**

| Zone  | Lumens | % Lamp | % Luminaire |
|-------|--------|--------|-------------|
| 0-30  | 852    | 14.4   | 15.6        |
| 0-40  | 1450   | 24.6   | 26.6        |
| 0-60  | 2838   | 48.1   | 52.1        |
| 0-90  | 4407   | 74.7   | 80.9        |
| 0-180 | 5447.7 | 92.3   | 100.0       |

**SRK-4-U-T8 used for test**


Total Luminaire Optical Efficiency = 97.5%

**Luminaire Spacing Criterion**

0 deg. - 1.3 | 90 deg. - 1.0

\*Call factory for full photometric report


**Bracket Side View**

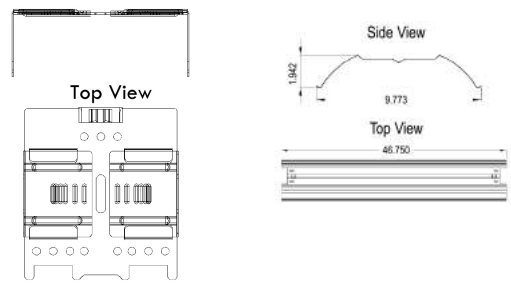

# STRIP REFLECTOR RETROFIT KIT (SRK)

## 4' & 8' Industrial Retrofit Kits


### Data and Dimensions for SRK Narrow

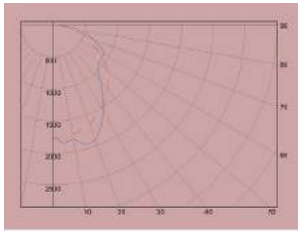

0° Candela Plot  
45° 2 Lamp T8  
90°

#### Zonal Lumen Summary

| Zone  | Lumens | % Lamp | % Luminaire |
|-------|--------|--------|-------------|
| 0-30  | 1486.2 | 25.6   | 27.4        |
| 0-40  | 2405.1 | 41.5   | 44.3        |
| 0-60  | 4092.8 | 70.6   | 75.3        |
| 60-90 | 1339.6 | 23.1   | 24.7        |
| 0-90  | 5432.4 | 93.7   | 100.0       |

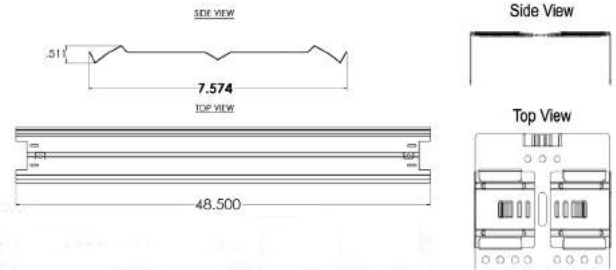

#### SRK-4-N-T8 used for test

Total Luminaire Optical Efficiency = 93.7%

#### Luminaire Spacing Criterion

0 deg. - 1.27 | 90 deg. - 1.27

\*Call factory for full photometric report


#### Standard SRK-4 Kit Includes:

- (1) 4' aluminum reflector made from your choice of specified material (95% Enhanced Miro4 or 92% White-painted)
- (2) reversible white-painted aluminum brackets adjustable to any channel size between 4.0" and 5.25"
- (4) specified shunted or unshunted high quality chemical resistant, thermoplastic bodied, UL-approved lamp holders
- (2) quarter turns
- (5) TEK screws

#### Standard SRK-8 Kit Includes:

- (2) (1) 4' aluminum reflector made from your choice of specified material (95% Enhanced Miro4 or 92% White-painted)
- (4) reversible white-painted aluminum brackets adjustable to any channel size between 4.0" and 5.25"
- (8) specified shunted or unshunted high quality chemical resistant, thermoplastic bodied, UL-approved lamp holders
- (4) quarter turns
- (10) TEK screws

#### SRK Universal

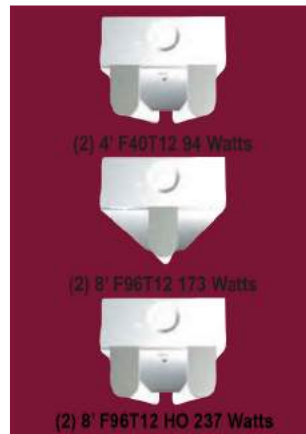

#### SRK Narrow

