



Short Specification:

Let freedom ring with our Liberty LED strip fixture! This sleek and modern profile fixture is designed and made in the U.S.A. With various lengths and two different lens options to choose from, there is a Liberty LED for every space and application. Electricians will love the easy installation and designers will be thrilled to see the variety of options available to them. Incorporate the Liberty LED into your next lighting project and see the brilliance of this American hero for yourself.

MODEL	DESCRIPTION	WATTS Model (Actual)	LUMENS	VOLTS
LIB2-15	2' 15W Liberty Linear LED	15 (12.19)	1,656	120/277V
LIB2-20	2' 20W Liberty Linear LED	20 (15.52)	2,019	120/277V
LIB2-30	2' 30W Liberty Linear LED	30 (25.1)	3,312	120/277V
LIB3-20	3' 20W Liberty Linear LED	20 (18.66)	2,471	120/277V
LIB3-25	3' 25W Liberty Linear LED	25 (28.3)	3,534	120/277V
LIB3-40	3' 40W Liberty Linear LED	40 (35.8)	4,750	120/277V
LIB4-20	4' 20W Liberty Linear LED	20 (18.64)	2,419	120/277V
LIB4-30	4' 30W Liberty Linear LED	30 (25.9)	3,528	120/277V
LIB4-40	4' 40W Liberty Linear LED	40 (34.8)	4,670	120/277V
LIB4-60	4' 60W Liberty Linear LED	60 (53.1)	6,691	120/277V
LIB4-70	4' 70W Liberty Linear LED	70 (64.34)	8,182	120/277V
LIB5-35	5' 35W Liberty Linear LED	35 (31.8)	4,608	120/277V
LIB5-50	5' 50W Liberty Linear LED	50 (50.2)	6,723	120/277V
LIB5-65	5' 65W Liberty Linear LED	65 (59.29)	7,983	120/277V
LIB6-50	6' 50W Liberty Linear LED	50 (52.8)	7,152	120/277V
LIB8-40	8' 40W Liberty Linear LED	40 (37.6)	5,232	120/277V
LIB8-60	8' 60W Liberty Linear LED	60 (53.1)	7,780	120/277V
LIB8-70	8' 70W Liberty Linear LED	70 (66.3)	9,509	120/277V
LIB8-90	8' 90W Liberty Linear LED	90 (95.5)	13,135	120/277V
LIB8-110	8' 110W Liberty Linear LED	110 (101.1)	14,454	120/277V
LIB8-140	8' 140W Liberty Linear LED	140 (128)	17,960	120/277V
LIB8-150	8' 150W Liberty Linear LED	150 (142.8)	19,502	120/277V

Above lumen outputs are done in 5000K CCT.

-please check the DLC qualified product list for all listings/variations



Applications:

- Parking Garages
- Refrigeration
- Schools/Universities
- Gymnasiums
- Stairwells/Passageways
- Warehouses

Features:

- High lumen output provides 130 Lm/W
- Wall mountable - ADA compliant
- Screw-in LED pan and single grounding for easy installation
- U.S.A. made LED driver available
- 3,000K to 5,000K color temperatures
- CRI: +82
- Operating temp: -20°C to +75°C
- 0 to 10V continuous dimming is standard
- Optional motion and occupancy sensors are available
- Continuous dimming to 5% output available
- L70 @ 50,000
- Battery backup option is available (Please consult factory)
- 5 year limited warranty
- Frosted polycarbonate lenses - virtually indestructible, better than impact resistant

LIBERTY

LED Linear Fixture

Ordering Information:

--	--	--	--	--	--	--	--	--

SERIES	COLOR TEMP	VOLTAGE	LENS TYPE	FINISH	DIMMING	MOUNTING	CORD & PLUG	OPTIONS
LIB2-15	3K - 3,000 K	U - (120-277 V)	R - Short Radial	W - White	D - 0 to 10V	S - Surface Mount	N	OCC
LIB2-20	35K - 3,500 K	H - (347V-480 V)	Frosted Polycarb.	C - Custom	dimming	A - Aircraft Cable	6SW	BLD
LIB2-30	4K - 4,000 K		F - Tall, Full Radius				6SB	E2E
LIB3-20	5K - 5,000 K		Frosted Polycarb.				1SW	OH1
LIB3-25							1SB	OH2
LIB3-40							6L5W	HT
LIB4-20							6L5B	USA
LIB4-30							1L5W	N9
LIB4-40							1L5B	EMF
LIB4-60							6L6W	EM5
LIB4-70							6L6B	EM7
LIB5-35							1L6W	EM10
LIB5-50							1L6B	EM12
LIB5-65							6L7W	EM20
LIB6-50							6L7B	
LIB8-40							1L7W	
LIB8-60							1L7B	
LIB8-70							6FW	
LIB8-90								
LIB-110								
LIB8-140								
LIB8-163								

Sample Part Number: LIB4-20-5K-U-R-WH-D-S-N-OCC

Cord & Plug Descriptions:

- N - Internal wiring
- 6SW - 6' Standard White 120-277V
- 6SB - 6' Standard Black 120-277V
- 1SW - 10' Standard White 120-277V
- 1SB - 10' Standard Black 120-277V
- 6L5W - 6' L5-15 White 120V Twist Lock
- 6L5B - 6' L5-15 Black 120V Twist Lock
- 1L5W - 10' L5-15 White 120V Twist Lock
- 1L5B - 10' L5-15 Black 120V Twist Lock
- 6L6W - 6' L6-15 White 240V Twist Lock
- 6L6B - 6' L6-15 Black 240V Twist Lock
- 1L6W - 10' L6-15 White 240V Twist Lock
- 1L6B - 10' L6-15 Black 240V Twist Lock
- 6L7W - 6' L7-15 White 277V Twist Lock
- 6L7B - 6' L7-15 Black 277V Twist Lock
- 1L7W - 10' L7-15 White 277V Twist Lock
- 1L7B - 10' L7-15 Black 277V Twist Lock
- 6FW - 6' Flexible Whip


Options Descriptions:

- OCC - Occupancy Sensor
- BLD - Bi Level Dimming
- E2E - End to End wiring for daisy chaining fixtures
- OH1 - Open 7/8" hole on one endcap
- OH2 - Open 7/8" hole on both endcaps
- HT - High temperature 75° rating
- USA - USA made LED driver
- N9 - Nimbus 9 UNIFI system
- EMF - Field installed emergency ballast backup system
- EM5 - Emergency battery backup 5 watts
- EM7 - Emergency battery backup 7 watts
- EM10 - Emergency battery backup 10 watts
- EM12 - Emergency battery backup 12 watts
- EM20 - Emergency battery backup 20 watts

PROFILES


2 - FOOT

L=22.371




3 - FOOT

L=33.140




4 - FOOT

L=44.364

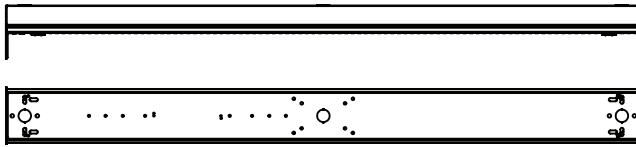


5 - FOOT

L=55.385

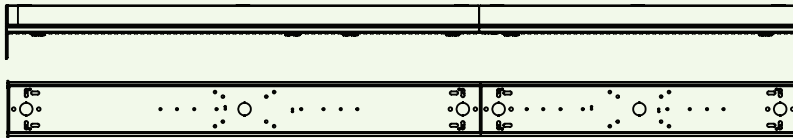


6 - FOOT

L=66.154

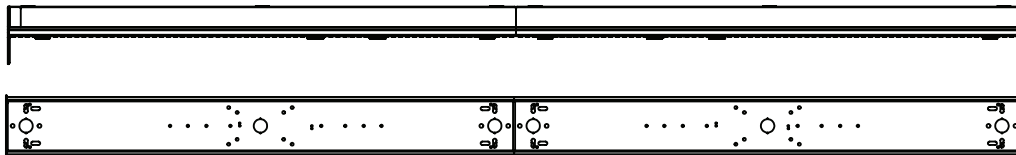


8 - FOOT

L=88.606

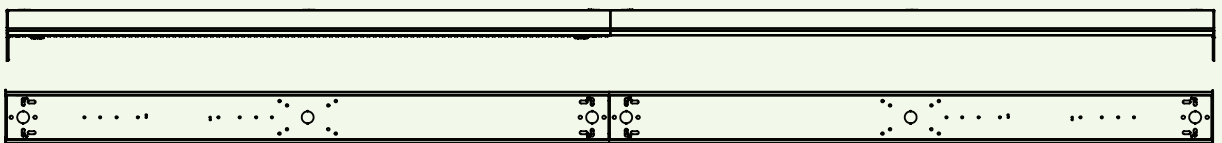

TALL

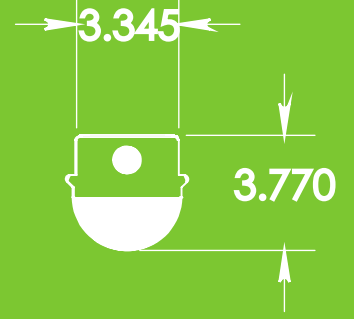

SHORT

