

### Short Specification:

LouversLED presents the first UL-924 LED Exit Sign Retrofit Kits approved for use with Edgelit and Sign Box styles. They are approved for use with Alkco, Cooper, High-Lites, Lightolier, Lithonia, Surelites, Big Beam and Western Lighting signs, and many more. They're easy to install (splice into existing wires) and offer 89% back in energy savings. That's approximately a one-year payback! These are also made in the USA!




MODEL	WATTS	LUMENS	VOLTS	DIMENSIONS (LxWxD)
ESR	4.25	612	120-277V	7 11/16" x 7/8" x 1/2"

### Features:

- Eligible for several incentives such as LEED points and Utility Rebates (ComEd and ConEd)
- Designed in Chicago, IL.
- Made in the U.S.A.
- 30 LEDs total
- All mounting hardware is included
- Installs in 8-10 minutes
- No bulb replacement needed for at least 5 years
- 5,000K CCT
- 5 year limited warranty

Type —EFG (Exit Fixture General) Exit Fixture Retrofit kit intended for use only in single or double faced stencil exit fixtures having a legend not exceeding 6 inch (152 mm) in height. Replacement diffusers are not included. Type EFG kits are suitable for use with UL-certified exit fixtures of the following interior dimensions: 6-1/4 to 8-7/8 inches high, 9-1/2 to 13-7/16 inches wide, and 7/8 to 3-1/4 inches deep .

Type —EFS (Exit Fixture Specific) FOR USE ONLY WITH EXIT FIXTURE, ++ MANUFACTURED BY Lithonia, where the ++ is Models LRP-1RW-xx-120/277-PNL, where xx represents LA, RA, LRA, DA.

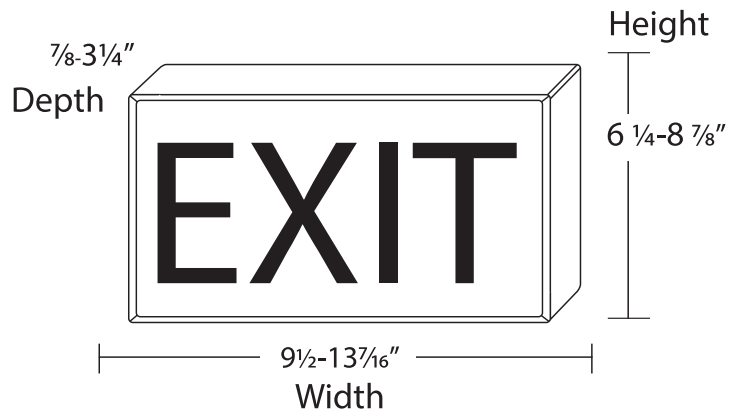

E495318



APPROVED



APPROVED

